


38 729 000 UNISET ELEMENT FOR WC WITH FLUSHING CISTERN 80 MM



PRODUCT DESCRIPTION

- 6 - 9 l adjustable
- pneumatic discharge valve offering 3 modes of operation: dual flush or start/stop or single flush
- outlet bend ø 80 mm
- inlet and outlet connecting set
- steel frame, hot galvanized, with 4 fixing brackets
- 2 WC fixing bolts
- distance of fixing bolts 180/230 mm
- fixing device for ceramic
- water supply connection from top
- low noise (group I acc. to German Noise Specification)
- with plaster base coating made of vinyl fleece
- angle valve ½"
- with push fit flexible hose union
- inspection shaft with protecting block
- for vertical use
- for mounting of small flush plates please order revision shaft 40 949 000 (sold separately)

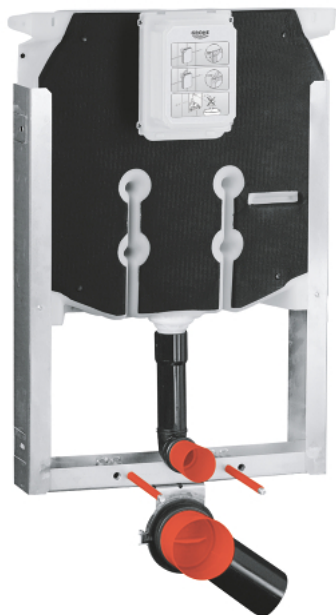