


38 746 000 **RAPID SL** **FOR WALL-HUNG WC**

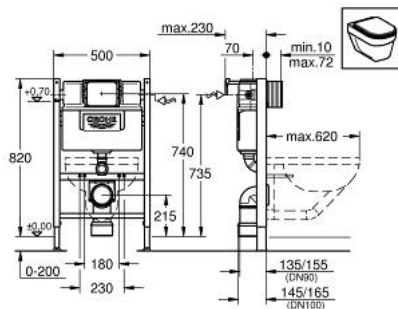

PRODUCT DESCRIPTION

- with flush cistern 6 l
- for on-the-wall installations or studded walls
- 0.82 m installation height
- powder coated steel frame, self-supporting
- for dry-cladding, completely pre-assembled
- with fixed connections
- quick adjustment, lockable
- fixing material
- 2 WC fixing bolts
- fixing device for ceramic
- distance of fixing bolts 180/230 mm
- outlet bend Ø 90 mm
- depth adjustable
- reducer Ø 90/110 mm
- inlet and outlet connecting set
- flushing cistern 6 l
- plus 3 l safety flush volume
- pneumatic discharge valve offering 3 modes of operation: dual flush or start/stop or single flush
- front or top actuation
- water supply from left/right or back
- low noise (group I acc. to German Noise Specification)
- insulated against condensation
- ½" water supply connection including integrated angle valve and push fit flexible hose union
- polystyrene protecting block
- including wall plate Skate Air
- horizontal installation
- 156 x 197 mm
- chrome
- made of ABS
- 2 wall brackets with fixing material
- GROHE Water Saving - Less water, perfect flow