


38 892 000 RAPID SL FOR WASH BASIN

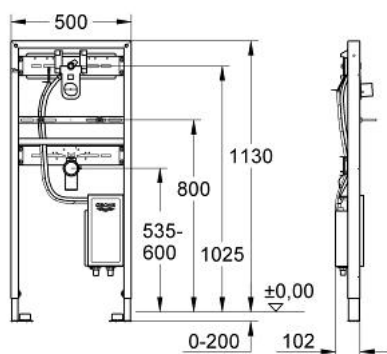

PRODUCT DESCRIPTION

- for wall mounted fittings
- with Roughing-in Set for infra-red electronic Europlus E 36 042 000 Essence E 36 252 000 Allure E 36 235 000
- thermostatic scalding protection
- 1.13 m installation height
- for on-the-wall installations or studded walls
- powder coated steel frame
- self-supporting
- for dry-cladding, completely pre-assembled
- quick adjustment, lockable
- fixing material
- wash basin fixing bolts M10 with fixing device for ceramic
- variable distance of fixing bolts
- HT-outlet bend DN 50
- seal Ø 32 mm
- pre-mounted roughing-in set with protecting block
- fire-proof pipe for laying electronic cables
- installation box with water group, stop valve and flush elbow
- connection with noise protected fitting holder 1/2"
- connecting box for mains supply 230 V
- CE approved
- with Grohtherm Micro thermostatic scalding protection
- temperature adjustment with scaling and allen-key actuation
- built-in non return valves
- dirt strainers
- without accessories for on-the-wall installation